
SCHEDULE H


TAC (B.C.) BUS

T.A.C. (B.C.) Bus

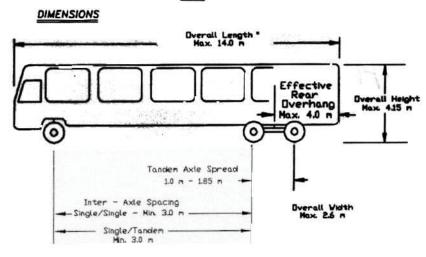

*Note: If overall length is 12.5 m or greater, a minimum of 3 axles is required. Overall length includes bumpers.

WEIGHTS

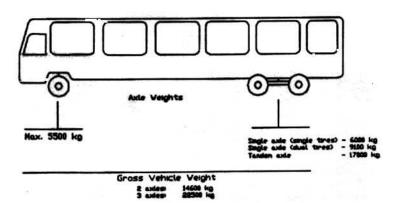

NOTE

- When there is more than one axle at the rear of the bus, the load carried by the group must be distributed between axles in a ratio corresponding to the number of tires on each axle.
 100 kg/cn of tire width is applicable to all tires and maximum 3 000 kg/tire is applicable to all axles except the steering axle.