


# SCHEDULE E

## TAC (B.C.)


### STRAIGHT TRUCK\* AND PONY TRAILER+ COMBINATION

#### T.A.C. (B.C.) STRAIGHT TRUCK AND PONY TRAILER COMBINATION+

#### DIMENSIONS

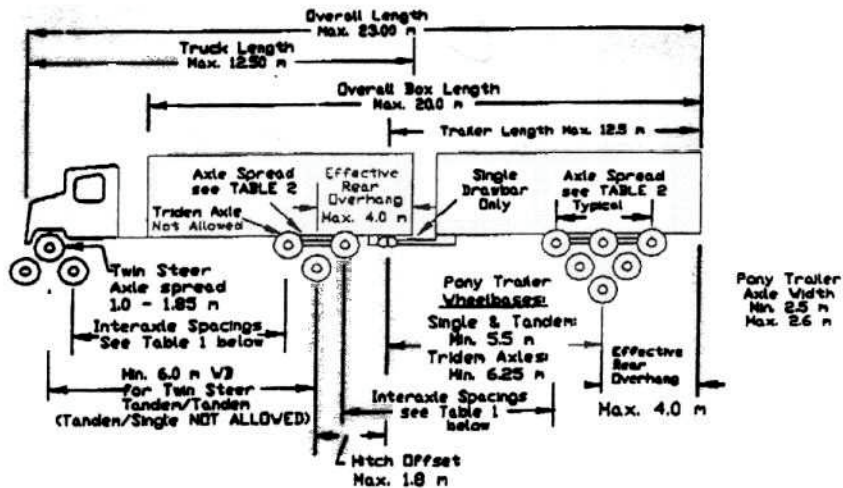

#### WEIGHTS

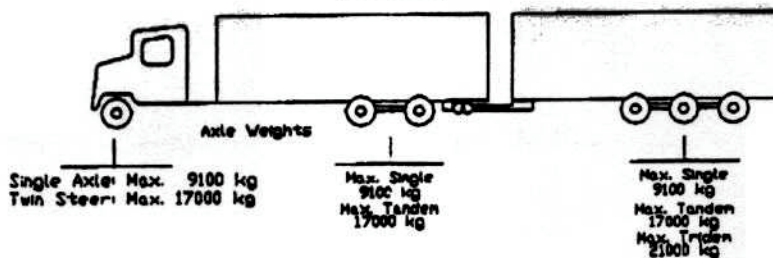

#### Maximum Gross Combined Vehicle Weight

<p><b>Single Steer:</b> Max. 3 Axles – 27 300 kg; Max. 4 Axles – 35 200 kg; Max. 5 Axles – 43 100 kg; Max. 6 Axles – 47 100 kg;</p>	<p><b>Tandem Steer:</b> Max. 4 Axles – 35 200 kg Max. 5 Axles – 43 100 kg Max. 6 Axles – 51 000 kg Max. 7 Axles – 55 000 kg</p>
---	---

**TABLE 1: INTERAXLE SPACING (MIN. DISTANCES)**

	Single	Tandem	Tridem
Single	3 m	3 m	3 m
Tandem	3 m	5 m	5.5 m
Tridem	3 m	5.5 m	

**TABLE 2: AXLE SPREAD**

Single	Up to Max. 1.0 m
Tandem	Min. 1.0 m – Max. 1.85 m
Tridem (for pony trailer only)	Min. 2.4 m – Max. 2.5 m

Notes: Maximum 3 000 kg/tire applicable to all axles except steering axle(s). Maximum 110 kg/cm of tire width applicable to all tires. Effective January 1, 2005, 100 kg/cm of tire width applicable to all tires.

\*TAC weights and dimensions of the combination not applicable when the pony trailer has a gross vehicle weight rating (GVWR) less than 10 000 kg.