


### SCHEDULE G

## TAC (B.C.) C-TRAIN WITH "C CONVERTER DOLLY"

### T.A.C. (B.C.) C-TRAIN WITH "C CONVERTER DOLLY"

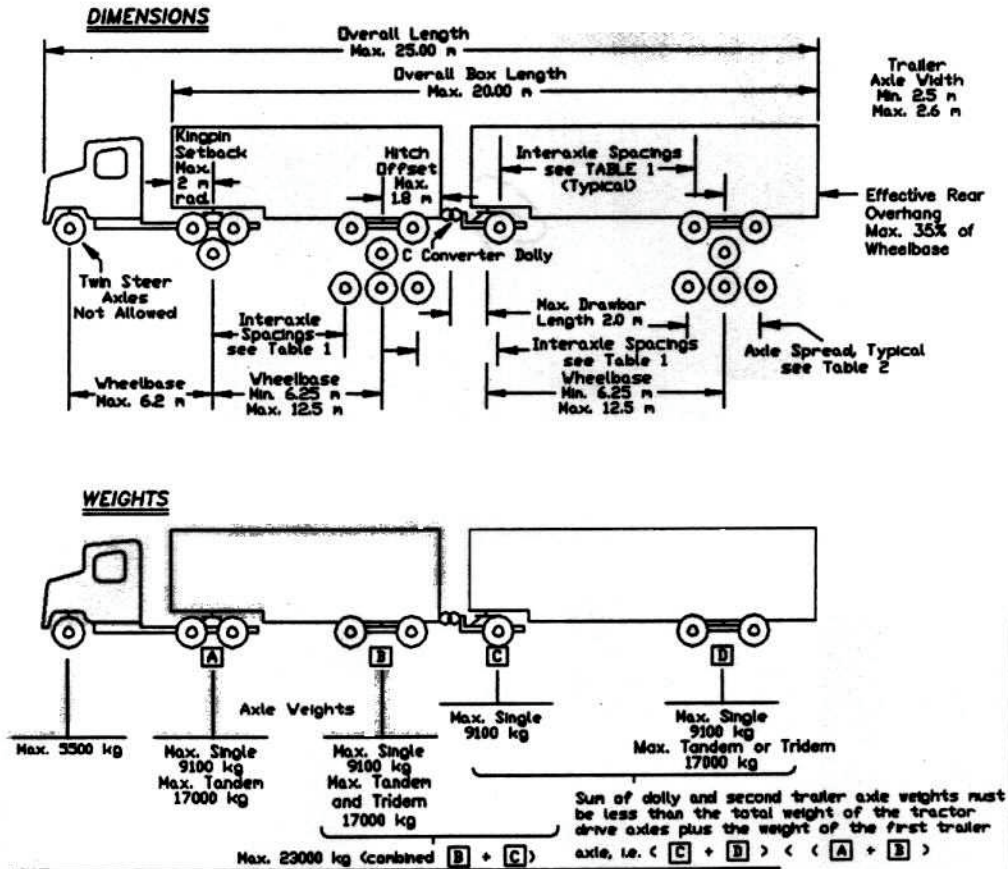

**Maximum Gross Combined Vehicle Weight**

Max. 5 axle <sup>a</sup>	41900 kg
Max. 6 axle <sup>a</sup>	49800 kg
Max. 7 axle <sup>a</sup>	54600 kg
Max. 8 axle <sup>a</sup>	60500 kg

<sup>a</sup>Tridem will be regarded as 2 axles (tandem axle) here

TABLE 1 - INTERAXLE SPACING (MIN. DISTANCES)

	Single	Tandem	Tridem
Single	3 m	3 m	3 m
Tandem	3 m	3 m	5.5 m

TABLE 2 - AXLE SPREAD

Single (can include tandem)	up to 1.8 m
Tandem	1.0 m - 1.85 m
	2.4 m - 3.7 m

Note: 100 kg/cm tire width applicable to all tires.  
 Max. 3000 kg/tire applicable to all axles except the steering axle which is limited to 5500 kg.

T\_TR\_C9.DWG  
 JULY 15, 1999